


Construction Staging & Traffic Management

The reconstruction will be completed in stages using median crossovers to separate traffic from the work zone.

The westbound and eastbound lanes will be reconstructed in separate stages. During each stage, only one side of one interchange will be closed, with alternate access provided at the adjacent interchanges.

Access to the Tilbury OnRoute Service Centres will be maintained during construction, as much as possible. The rehabilitation of Charing Cross Underpass (Site 13-235) will use temporary traffic signals to maintain one lane of traffic on Charing Cross Road during construction.

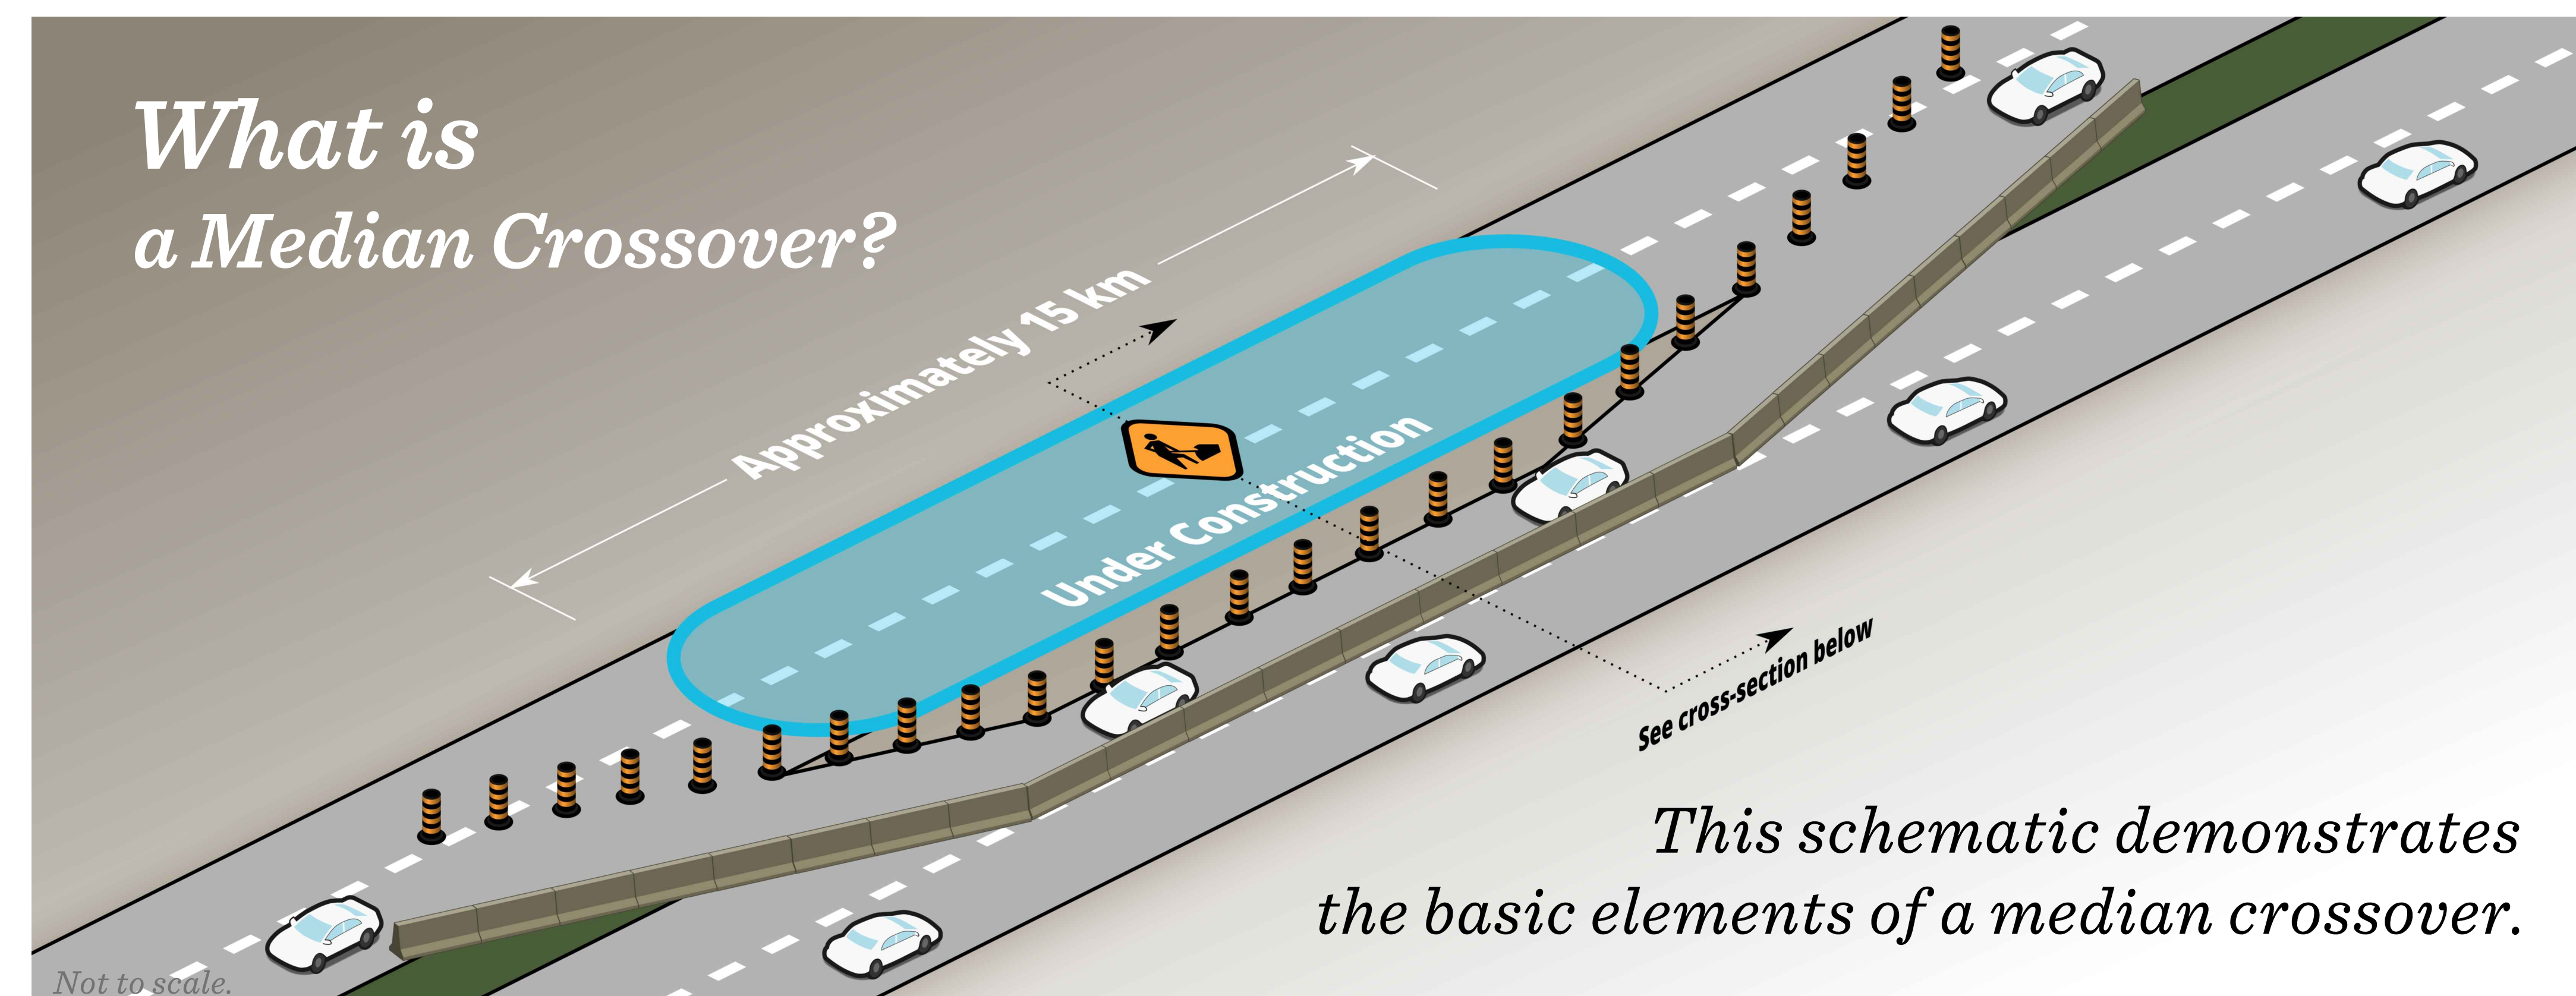

Construction Staging Median Crossover

